

THE PERFECT SOLUTION

///ATMOSEAL®

Customized for the perfect seal.

14", 18" or 22" projection

Galvanized steel side and strapping supports.

Long lasting high quality vinyl with UV stabilizer to prevent cracking.



Perfect for servicing a wide variety of trailer heights.

Long-lasting and low maintenance.

Can be totally automated dock loading system.

"RIP STOP" fabric provides greater resistance to wear and tear.

SERIES V14/V18/V22

ADJUSTABLE HEADER INFLATABLE SEAL

Designed for door openings up to 8'0"W x 10'0"H, the **Series V14/V18/V22** services a wide variety of different trailer heights. Since the trailer is spotted before the seal is inflated, the V Series is the ideal solution to eliminate potential damage to the structure of the building wall. This unique sealing process seals effectively and completely even if the trailer is off center, jack-knifed, or on a sloped approach. SuperSeal's exclusive "RipStop" fabric developed specifically for inflatables will give years of trouble free service. The Series V14/V18/V22 creates an optimum seal that blocks out foul weather, insects, dust, and dirt, while saving money on energy costs. Inflatable dock door seals help productivity by increasing safety, protecting personnel, products, and equipment.

SUPER SEAL

Tel: 905.850.2929 Tel: 1.800.337.3239
Fax: 905.850.2922 Fax: 905.850.4440


www.supersealmfg.com

SuperSeal Mfg. Ltd.
670 Rowntree Dairy Rd.,
Woodbridge, Ontario, Canada L4L 5T8

SPECIFICATIONS

Series V14/V18/V22 product details:


- Series V14/V18/V22 standard dimensions for door openings 8'0"W x 10' H are 9'4"W x 11'8" H (O.D.) with a 14", 18", 22" projection, 12' face across the vertical air bags, and a 48' header air bag when inflated.
- Seal trailers 10'6" to 13'6" H from a grade with a dock height of 48". Exclusive 16 oz. "RipStop" fabric developed specifically for inflatable units give years of trouble free service (see fabric page).
- Can be part of a totally automated dock loading system.
- V-14 designed for standard 5" bumper projection.

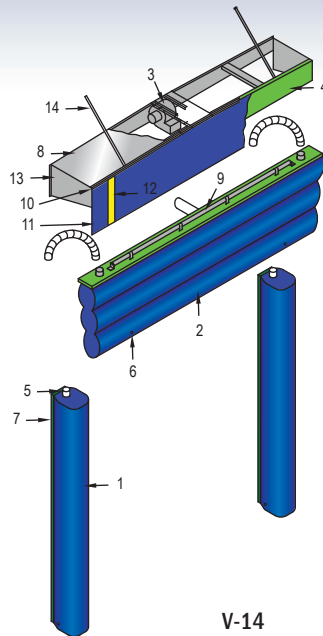


1. Vertical Air Bag
2. Header Air Bag
3. Motor/Blower
4. Pressure Treated Wood Canopy
5. Air Connector Ducts
6. Air Vents
7. Pressure Treated Wood Backing
8. Galvanized Colour Steel Cladding
9. Torsion Spring Assembly
10. Finish Angle Trim
11. Reinforced Vinyl Curtain
12. 4" Yellow Guide Stripe
13. Side Supports
14. Canopy Support Straps

Specifications:

Adjustable header inflatable dock door seal(s) to be V14/V18/V22 manufactured by SuperSeal Mfg. Ltd., Woodbridge, Ontario. Adjustable header inflatable dock door seal(s) to be manufactured to fit door opening size(s) _____ ft. W x _____ ft. H. Unit to consist of two (2) vertical air bags to be fastened onto a 2" x 8" pressure treated wood (supplied unassembled by manufacturer), using galvanized wood screws. Verticals to have a slight upward taper from back to front to avoid pinching or sagging when deflated. The bottom of the vertical seals to include holes for venting of air and to assist in moisture drainage. Inflatable header air bag to be full width over vertical seals mounted on a pressure treated wood frame. Inflatable header air bag in deflated mode is stored behind a reinforced vinyl curtain with a 4" yellow guide stripe to aid in the spotting of trailers. Unit to be supplied with 1/2 HP motor/blower with a manual ON/OFF. The motor/blower shall be mounted under a protective canopy constructed of a wood/steel galvanized framework covered with galvanized steel cladding. The top canopy shall be peaked to allow drainage and shall be fastened to the wall by means of galvanized steel side and strapping supports. Unit is inflated by turning switch on and deflates automatically when unit is turned off by means of internal pulley and retraction arm system for the verticals (excluding V14) and a torsion roller assembly for the header. Unit to be manufactured of exclusive 16 oz. vinyl "RipStop" fabric. Double stitched, high strength, twisted 4-ply 100% polyester treated used for sewing throughout. Unit shall be furnished with all necessary mounting hardware, galvanized to resist corrosion.

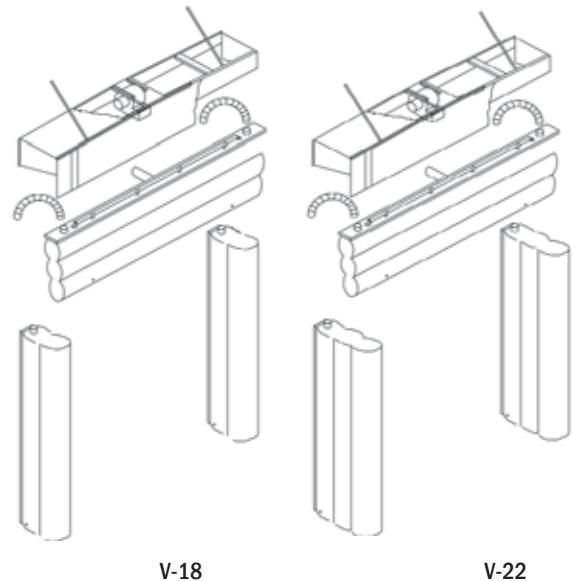


Options:



A. Automatic switch kit



B. Foam pads in lieu of.



C. Higher unit



DEALER IMPRINT



Custom Designs Available!

** All Super Seal products are subject to design modifications without notice. Product may be shown with non-standard options.