

# DURAGRILLE™



DuraGrille, brick pattern

A T T R A C T I V E

V I S I B L E

S E C U R E

**Asselin**  
**Industriel**  
**Porte Dorion 1948**

1660 Cité des Jeunes  
Les Cèdres, Québec  
Canada, J7T 1K9  
[asselininc@gmail.com](mailto:asselininc@gmail.com)  
[www.asselinindustriel.com](http://www.asselinindustriel.com)  
[www.portedorion.com](http://www.portedorion.com)  
450-200-0633 Vaudreuil-Soulange  
514-453-5120 Montréal

# DURAGRILLE™

ROLLING GRILLE DOORS

When security and visibility are primary considerations, choose our attractive rolling DuraGrille security grille. The grille pattern, available in straight or brick, offers an unobstructed view of displays and merchandise. DuraGrille security grilles offer protection against theft and vandalism — all with a contemporary look.



DuraGrille, straight pattern

Series MODEL	Finish	Grille Construction	Patterns	Guides	Maximum Sizes	Optional Hood
GSA	Aluminum Mill, Clear or Bronze Anodize	5/16" Aluminum Rods with Interlocking Aluminum Links	Straight	Aluminum	35' Width 24' Height	Steel or Aluminum
GBA			Brick			

NOTE Contact factory for special sizes.

WARRANTY DuraGrille security grille doors carry a 1-year limited warranty. See your local Raynor Dealer for complete details.



## MODEL OPTIONS AND UPGRADES

### ① Increased security.

6" center-to-center link spacing provides added protection.

### ② Anodized finishes.

Upgrade to a bronze or clear-anodized finish for a brighter appearance and increased durability.

### ③ Curtain hood.

Optional curtain hood has rolled edges and is formed from 24-gauge, hot-dipped galvanized steel, or aluminum.

### ④ Head plate cover.


Head plate covers are offered for an attractive, finished appearance and help to protect your investment by keeping out dust and grime.

### ⑤ Auto-Locks.

The auto-lock feature engages when someone attempts to force the door open, but does not engage during normal operation. Available for both Brick and Straight patterns, and for clear anodized or mill finish grilles.

### ⑥ Emergency Egress.

The Emergency Egress option for DuraGrille combines the security of the Raynor Auto-Lock System, and the safety of Raynor's LGE operator, which automatically opens the door when a power outage or fire alarm are detected.




## OPERATION



### **ControlHoist™ and PowerHoist™ operators.**

Raynor offers a full line of rugged ControlHoist and PowerHoist operators for jackshaft operation.



### **Control options.**

A variety of control stations and remote-activation devices are available.



### **Motor cover.**

Motor covers are helpful for noise reduction and provide an attractive look.



### **Crank operation.**


Hand-crank operation is available on all DuraGrille security grilles.



### **Chain operation.**


DuraGrille security grilles may also be hand-operated by chain.

Every DuraGrille security grille is built for superior performance and includes the features listed below. For additional options, please see the inside pages.



## Grille.

Offered in a contemporary brick pattern (right) or traditional straight pattern (left), grilles are constructed of  $\frac{5}{16}$ " mill-finished aluminum rods with 9" center-to-center interlocking links.




## Counterbalance system.

A torsion-spring-operated system, enclosed in a structural steel barrel, effectively counterbalances the security grille for a minimum of 15,000 cycles. Higher cycle torsion springs are also available.




## Aluminum guides.

Extruded aluminum guides are lined with a replaceable wool pile strip to reduce wear and provide quiet operation.




## Bottom bar.

An extruded aluminum bottom bar reinforces the curtain and provides smooth operation.

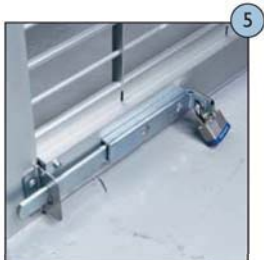

## Locks.

Manually-operated grilles are provided with slide-bolt locks. Other locking options are available.

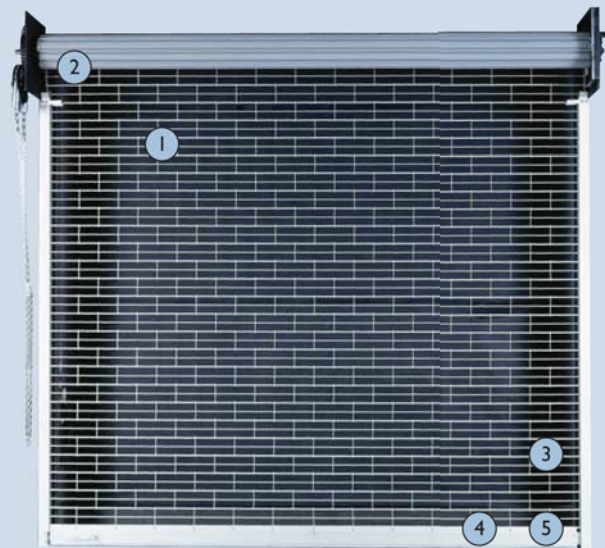

## APPLICATION GUIDE

DuraGrille	
Cafeteria/Concessions	●
High Security	◐
Shopping Mall/Retail	●
Underground Parking	◐

● Best Choice    ◐ Good Solution